

A

B

C

D

E

A



B

C

D

E

版次 (Vension)	变更内容 (Rev. Content)	变更者 (Change Person)

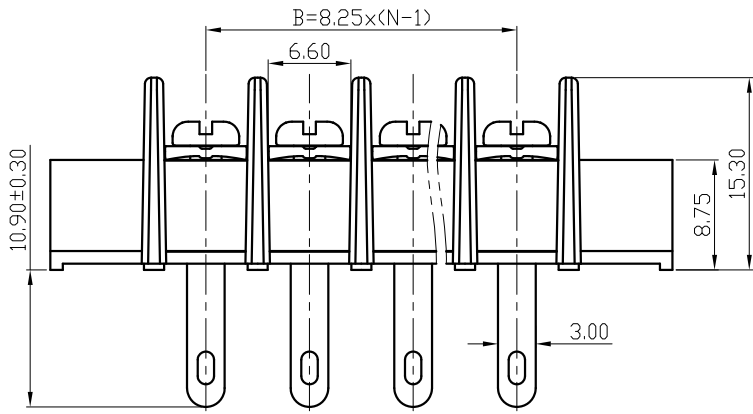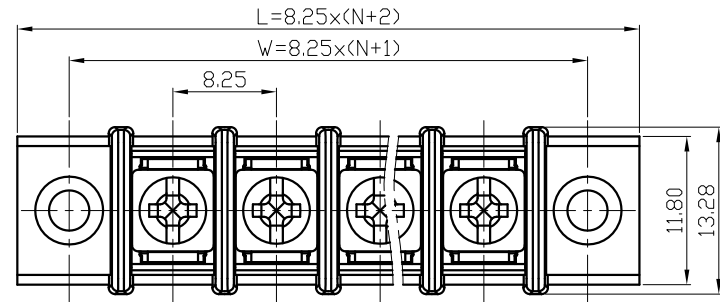

技术参数 (Technical Data)		
项 目 (Item)	UL	IEC
额定电气参数 (Rated Electrical Parameters)	300V/20A	450V/24A
压线范围 (Wire Range)	22~12AWG	2.5mm²
工频耐压 (Frequency Voltage)	AC 2500V	
冲击耐压 (Rated Surge Voltage)	4000V	
绝缘阻抗 (Insulation Resistance)	DC500V 500MΩ above	
接触电阻 (Contact Resistance)	≤8mΩ	
剥线长度 (Stripping Length)	6~7mm	
工作温度 (Temperature)	-40℃~+105℃	
材质和电镀 (Material and plating)		
绝缘材质 (Housing)	PA66 (UL94 V-0)	
触点材料 (Contact)	铜合金, 镀锡 (Copper alloy, Sn plated)	
螺丝 (Screws)	钢, 镀镍 (Steel, Nickel plating)	

产品命名编码:

(Product Number Code):

GSA30HW-8. 25-XXP-1Y-00A (H)

产品型号 (Series No.)

客户需求

(Customer Request)

极数 (No. of poles)

塑体颜色 (Housing Color)

- 1: 单倍间距
(Single Pitch)
2: 双倍间距
(Double Pitch)

- 1: 绿色 (Green) 7: 透明色
(Transparent)
2: 蓝色 (Blue)
3: 黑色 (Black) 8: 白色 (White)
4: 灰色 (Grey) 9: 黄色 (Yellow)
5: 橙色 (Orange) Y: 多种颜色
6: 红色 (Red) (Mixed Color)

P=8. 25mm, N为孔位数 (N for hole digits), 有效位数为 (Significant Digits): 02P~24P														
N	02P	03P	04P	05P	06P	07P	N	08P	09P	10P	11P	12P	13P	14P
L	33.00	41.25	49.50	57.75	66.00	74.25	L	82.50	90.75	99.00	107.25	115.50	123.75	132.00
W	24.75	33.00	41.25	49.50	57.75	66.00	W	74.25	82.50	90.75	99.00	107.25	115.50	123.75
B	8.25	16.50	24.75	33.00	41.25	49.50	B	57.75	66.00	74.25	82.50	90.75	99.00	107.25
N	15P	16P	17P	18P	19P	20P	N	21P	22P	23P	24P	25P	26P	
L	140.25	148.50	156.75	165.00	173.25	181.50	L	189.75	198.00	206.25	214.50	222.75	231.00	
W	132.00	140.25	148.50	156.75	165.00	173.25	W	181.50	189.75	198.00	206.25	214.50	222.75	
B	115.50	123.75	132.00	140.25	148.50	156.75	B	165.00	173.25	181.50	189.75	198.00	206.25	



宁波高胜电子有限公司
NINGBO GOOSVN ELECTRONIC CO.,LTD

型号 (Type): GSA30HW-8. 25-XXP-1Y-00A (H)		公差范围 (Tolerance Range)	
核准 (Approval):		150~	±1.50
审核 (Audit):		60~150	±1.00
设计 (Design):		30~60	±0.60
比例 (Scale): FULL		6~30	±0.40
单位 (Units): mm		0~6	±0.25
页码 (Page): 1/1		角度 (Angle)	X ±2° XX ±1°
图号 (Drawing NO.):		版次 (Version): T0	

1

2

3

4

5

6

7

8